


R1 TYPE



R2 TYPE

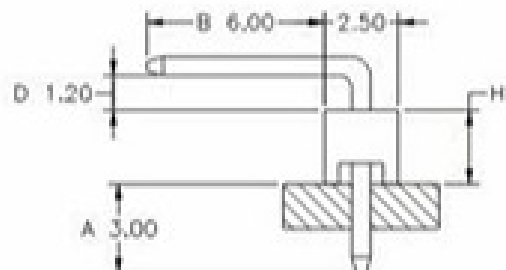

PCB LAYOUT

深圳市泽芯微科技有限公司

Ordering Information

1225	1	XX	G0	X	S	XXX	01
Plastics Height H=1.7mm H=2.54mm	No. of Pins Per Row 1x40 1~40	Contact Plating SN : Tin G0 : Gold Flash G2 : 5u ^g Gold G3 : 10u ^g Gold G4 : 15u ^g Gold G5 : 30u ^g Gold S0 : Gold Flash/Tin Standard: G0	Insulator Material Option A BK-PBT B BK-PA66 C BK-PA6T D BK-PA46 F BK-LCP S Special	Connector Type S= Straight R= Right Angle	Pin Length XXX=A+B+H XXX=A+D+H+B+1.25		

深圳市泽芯微科技有限公司